

# Showline

## SL STRIP 10 IP



The SL STRIP 10 IP is the ideal choice for outdoor entertainment applications, and wet environments. Ten cells of homogenized RGBW LEDs deliver a blended wash of colour, emulating the traditional halogen strip light effect, with reduced power consumption, lower heat output, and minimal maintenance.

Control each cell individually for maximum flexibility, or in groups for applications requiring simpler control. The SL STRIP 10 IP can be easily configured to suit your design requirements. Choose the appropriate dimming curve, utilize the in-built chase programs, and adjust the beam angle by inserting one of the optional holographic diffuser lenses.

With its rugged construction, internal power supply and simple operating system, the SL STRIP 10 IP is an ideal replacement for conventional MR-16 strip lights for all outdoor entertainment applications.

# Showline

## SL STRIP 10 IP

### FEATURES


- Rugged construction
- 10 homogenized RGBW LEDs
- 8-bit DMX-512A operates as 16-bit smooth resolution
- On-board LCD menu system for addressing and setup
- Remote configuration available via RDM
- DMX-512A (RDM) in and thru connections - 1m cable tails
- In and thru power connections - 1m cable tails

### BENEFITS

- Built-in preset and chase program
- Silent passive cooling
- Harmonize Color Calibration technology

### HARMONIZE COLOR CALIBRATION TECHNOLOGY

At the heart of all Showline products is Harmonize Calibration technology. Harmonize is a proprietary, advanced LED color matching system, consisting of 3 correction modules: RGB, RGBW and Cool White/Warm White. Every Showline fixture undergoes rigorous testing to provide you with consistent control of color and intensity as well as output of the highest quality.

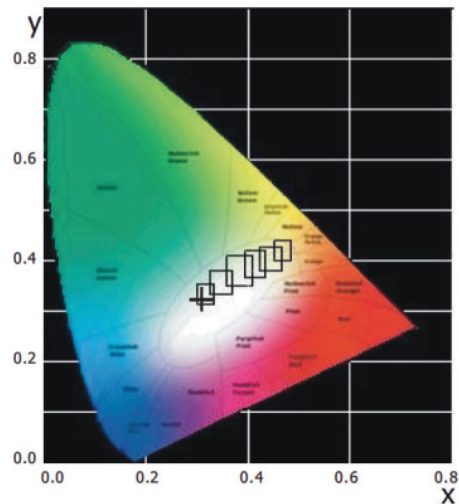

# Showline

## SL STRIP 10 IP

### SOURCE

Type	10 units of 4 in IRGBW LED engine
Wattage	150W

### OPTICAL PERFORMANCE

Lumen output (max)	2240
CRI/CQS	>90 (RGBW)
Lens size	15, 25, or 11 x 38° diffuser lens
Mode - 8-, 16-bit RGBW	1, 2, 5, 10 pixels

### BEAM

Beam angle	6° native beam angle
------------	----------------------

### POWER

Operating voltage	110 - 240VAC
Max wattage	500W

### DATA CONNECTIONS

DMX	In and thru
-----	-------------

### DATA PROTOCOLS

DMX (RDM)	DMX-512A(RDM)
-----------	---------------

### PHYSICALS

IP rating	IP65
Finish	Black
Construction	Metal frame, plastic covers

### ENVIRONMENT

	°C	°F
Operating temperature	-10-45	14-113
Operating humidity	33-45%	

### DIMENSIONS

	mm	in
H x W x L	1076.6 x 120 x 201	42.4 x 4.7 x 7.9

### WEIGHT


	kg	lb
Net weight	7.5	16.5

### WARRANTY & APPROBATION

Warranty	2 years
Approbations	CE

# Showline

## SL STRIP 10 IP

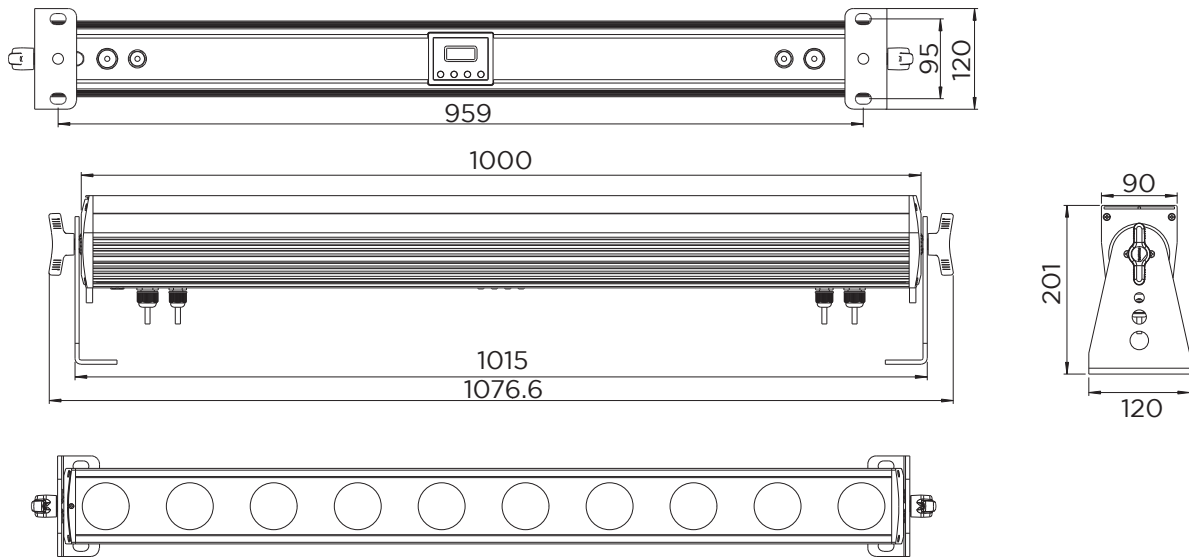

### PRODUCT NAME

### ORDER CODE

SL Strip 10 IP RGBW complete with lens shaping kit, DMX IP65 rated captive power and data cables (UL3)

**88-095-6472-36**  
**SLSTRIP10IP**

SL Strip 10 IP RGBW complete with lens shaping kit, DMX IP65 rated captive power and data cables (bare-end)

**88-095-5822-36**

© 2018 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 88-095-6472-36-100-v00