

Q-LITE OPEN FACE 1000W FLOOD LIGHT Q-LITE



The Q-LITE flood fixture is a 1000 Watt open-face luminaire that is a compact, lightweight, multipurpose flood/fill light. It is ideal for any stage, studio and location lighting application.

Designed to operate with a high-color-temperature tungsten halogen lamp, this unit is well suited for use in tight or confined spaces where maximum light output and beam spread are required for fill or flood lighting.



Product Features:

- Ventilated steel housing
- Broad even beam
- Compact and lightweight
- Accepts a wide range of lamps (lamp not included, sold separately)
- Available in 120VAC or 230VAC
- Includes safety screen, black snoot/color frame holder, and safety cable
- Weight: 7 lbs. / 3.18 kg (approximate)
- cETLus listed for indoor use
- Made in the USA

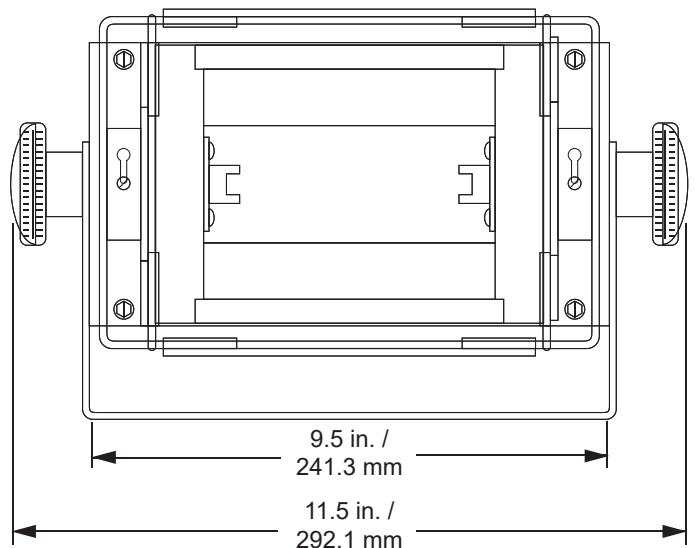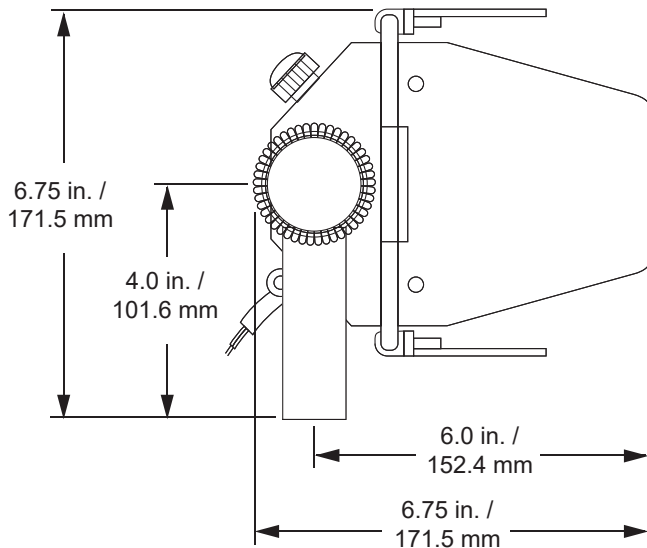

*Note: Drawing shown with optional
4-leaf barn door (sold separately)*

Specifications

Housing: Sheet steel construction.
Materials: Corrosion-resistant materials and hardware.
Yoke: Rigid flat steel with dual-locking-dog tilt handles.
Reflector: Peened specular aluminum.
Socket: Recessed single-contact, two provided. Tool-free re-lamping.
Rating: 120 or 230VAC operation, 8.3/4.2 Amps, 1000 Watts maximum.
Cable: 36" Teflon® leads encased in black fiberglass sleeving.
Accessories: Includes safety screen, black snoot/color frame holder, and safety cable with spring clip.
Finish: Black epoxy Sandtex, electrostatic application.
Weight: Approx. 7 lbs. (3.18 Kg)
Markings: cETLus Listed for indoor use.

Ordering Information


Q-LITE
 1000W Flood Light, 120VAC, Black Finish
Q-LITE
 1000W Flood Light, 230VAC, Black Finish

Included and Optional Accessories


SC-36-BK Safety Cable with Spring Clip *(included)*
QL-SN Black Snoot/Color Frame Holder for Q-LITE *(included)*
79-0503 Q-LITE Safety Screen *(included)*
QL-CF Color Frame
QL-BD4 Black 4-Leaf Barn Door for Q-LITE
F-SAS 510 Combination 5/8" x 1-1/8" Spigot Malleable Iron Pipe Clamp

Q-LITE Photometric Data with FCM (3200K) Lamp

V E R T I C A L

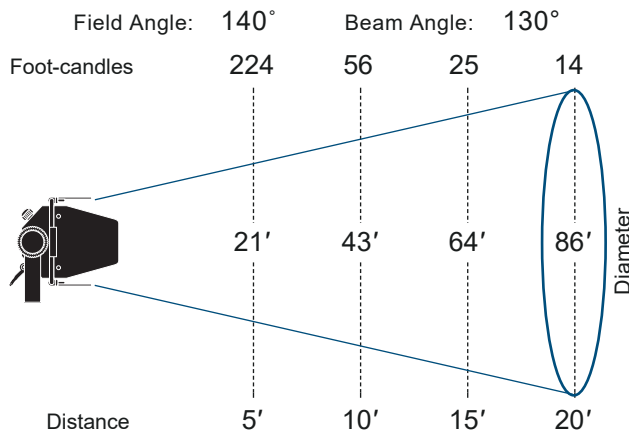

H O R I Z O N T A L

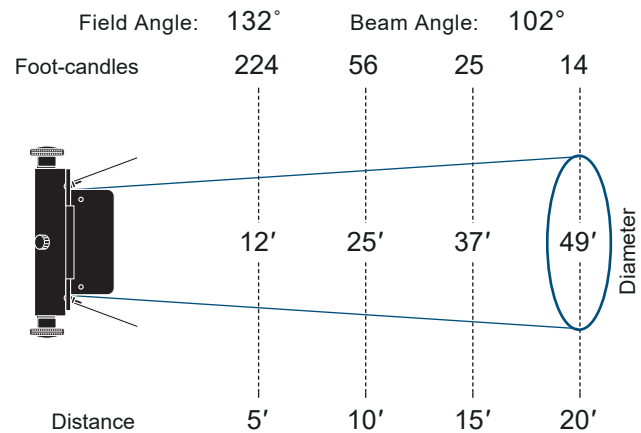

Watts	Volts	ANSI Code	Color Temp (K)	Rated Life (hrs)*	Rated Lumens*	Correction Factor	Finish
1000	120	FCM	3200	300	27,500	1.00	Clear
1000	120	FHM	3200	300	26,000	--	Frost
750	120	EJG	3200	400	20,000	0.73	Clear
750	120	EMD	3200	400	19,500	--	Frost
500	120	FDG	3200	400	13,250	0.48	Clear
500	120	FDN	3200	400	12,800	--	Frost
500	120	FCL	3000	2,000	10,950	0.40	Clear
500	120	FCZ	3000	2,000	10,700	--	Frost
300	120	EHM	2950	2,000	5,950	0.22	Clear
300	120	EHZ	2950	2,000	5,900	--	Frost
800	240	TU P2/GE23760	3200	150	22,000	--	Clear